
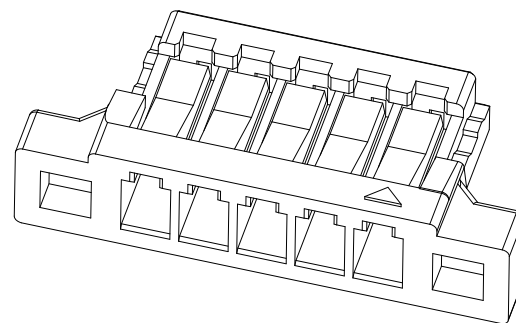
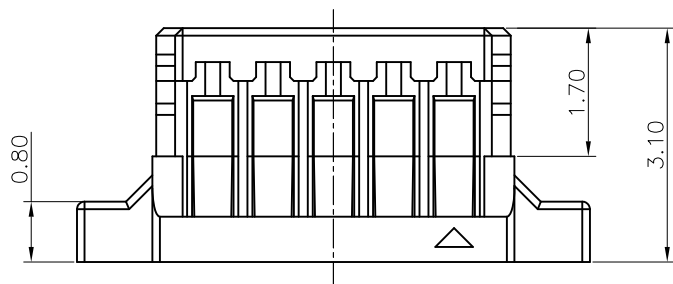


RoHS
COMPLIANT

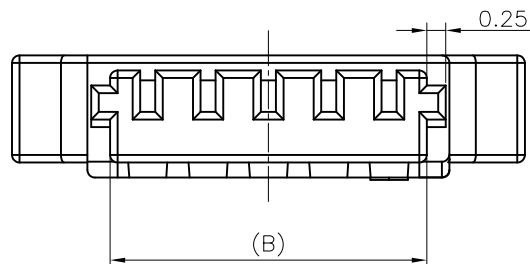

3D View

◆ SPECIFICATIONS

- Current rating: 0.5A AC, DC
- Voltage rating: 30V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 200V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:



Insulator: Nylon 46 or LCP UL 94V-0
Suitable: KR0800 Series Single Row Wafer

Ordering Code:

H08030 102 13 00 A

No. of Circuits 102:2, 120:20 00:Halogen free
01:Standard

Insulator Material
07:PA46 Natural
13:LCP Natural

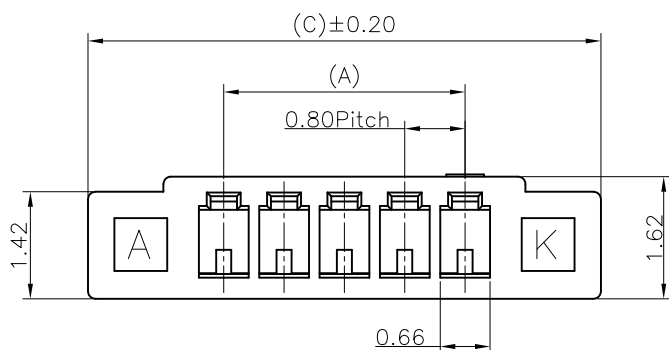

Pin	Dimensions			Pin	Dimensions		
	A	B	C		A	B	C
2P	0.80	1.80	4.40	12P	8.80	9.80	12.40
3P	1.60	2.60	5.20	13P	9.60	10.60	13.20
4P	2.40	3.40	6.00	14P	10.40	11.40	14.00
5P	3.20	4.20	6.80	15P	11.20	12.20	14.80
6P	4.00	5.00	7.60	16P	12.00	13.00	15.60
7P	4.80	5.80	8.40	17P	12.80	13.80	16.40
8P	5.60	6.60	9.20	18P	13.60	14.60	17.20
9P	6.40	7.40	10.00	19P	14.40	15.40	18.00
10P	7.20	8.20	10.80	20P	15.20	16.20	18.80
11P	8.00	9.00	11.60				

F		Add LCP Type	Arvin	2021.12.16	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: 0.8mm Crimp Housing Have ear	DRAWN: Shen 2021.09.23		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		Uniformly arrange the drawings	Shen	2021.09.23			CHECKED:				
		Change the part number and frame format	TLX	2020.01.10			APPROVED:		PART NO.:H080301****01A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	REV.:A4