

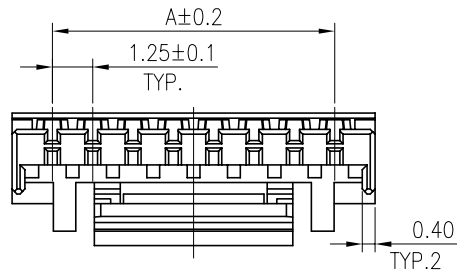


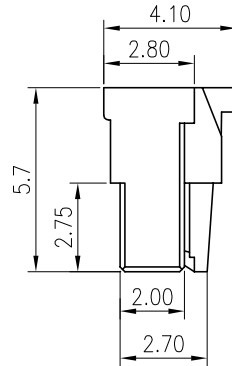
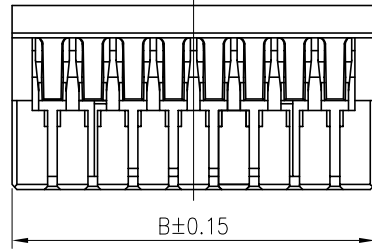

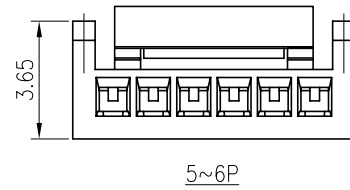


RoHS
COMPLIANT

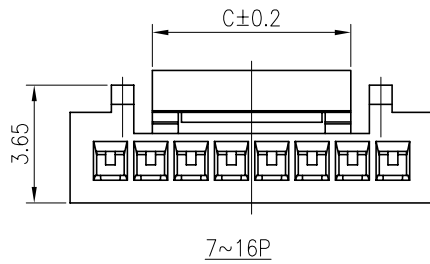

SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 50V AC, DC
3. Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Insulation resistance: 100MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30mΩ/ max.

Material: PA66 or PBT UL94 V-0
Suitable KR1259 Series Terminal
Mates With KR1259 Series Wafer

Ordering Code:

H125901** **01A

- 102=02P 01: PA66 UL94 V-0 White
103=03P 02: PA66 UL94 V-0 Black, HF
20: PA66 UL94 V-0 Red
24: PBT White

Circuits	Dimensions		
	A	B	C
2	1.25	3.85	1.90
3	2.50	5.10	2.90
4	3.75	6.35	4.15
5	5.00	7.50	4.15
6	6.25	8.75	6.15
7	7.50	10.00	6.15
8	8.75	11.25	6.15
9	10.00	12.50	6.15
10	11.25	13.75	8.10
11	12.50	15.00	8.10
12	13.75	16.25	8.10
13	15.00	17.50	8.10
14	16.25	18.75	8.10
15	17.50	20.00	8.10
16	18.75	21.25	8.10

F		Add specification	ZSZ	2022.03.28	TOLERANCE X.X ±0.25 X.XX ±0.15 X.XXX ±0.08 Angle ±2°	TITLE: GH1.25 Housing	DRAWN: Shen 2021.09.06		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		Uniformly arrange the drawings	Arvin	2021.09.06			CHECKED:				
		Change the part number and frame format	TLX	2020.03.28			APPROVED:		PART NO. : H125901****01A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: 1/1	SHEET: 1/1	PROJECTION	REV. : A5
	1	2	3	4	5	6	7	8	9		