

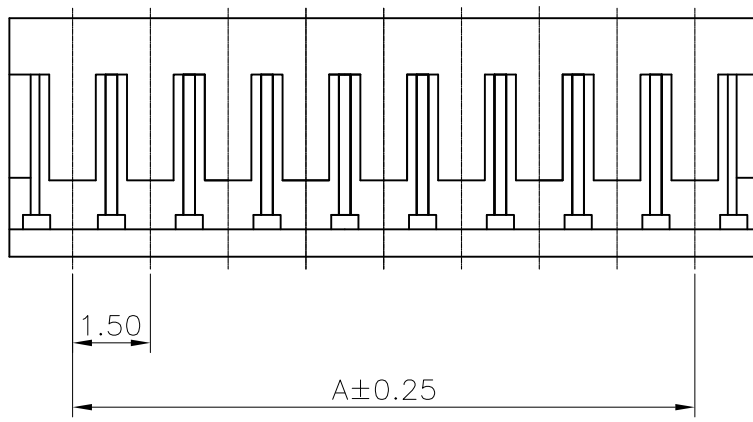
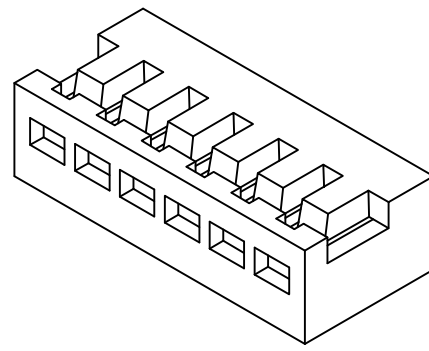


RoHS
COMPLIANT

- ◆ SPECIFICATIONS
- Current rating: 1A AC, DC
 - Voltage rating: 200V AC, DC
 - Temperature range: -40°C ~ +105°C
 - Insulation resistance: 500MΩ Min.
 - Withstanding voltage: 500V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0
Suitable: KR1502 series Terminal

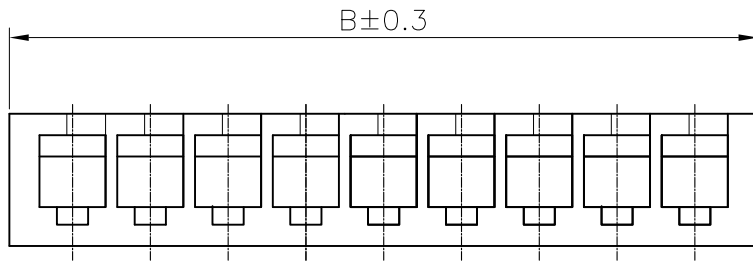

PART No.	Dimension	
	A	B
H150201020101A	1.50	3.70
H150201030101A	3.00	5.20
H150201040101A	4.50	6.70
H150201050101A	6.00	8.20
H150201060101A	7.50	9.70
H150201070101A	9.00	11.20
H150201080101A	10.50	12.70
H150201090101A	12.00	14.20
H150201100101A	13.50	15.70
H150201110101A	15.00	17.20
H150201120101A	16.5	18.70
H150201130101A	18.00	20.20
H150201140101A	19.50	21.70
H150201150101A	21.00	23.20
H150201160101A	22.50	24.70

F	A3	Uniformly arrange the drawings	Shen	2021.09.28	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: SZN1.5 Housing	DRAWN: Shen 2021.09.28		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.					
		A2	Change the part number and frame format	TLX			2020.03.28	CHECKED:						
	MARK		REVISION DESCRIPTION	SIGNATURE			DATE	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	REV.:A3	PART NO.:H150201**0101A	
	1	2	3	4			5	6	7	8	9	DRAWING NO.:1502H01-A-S		