

RoHS
COMPLIANT

SPECIFICATIONS





1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL94 V-2
Suitable KR2004 series terminal
Mate With KR2004 series wafer

Ordering Code:

H2004M *** 03 01A

No.of Circuits	102:02,116:16	Insulator Material
		03:PA66 White V2
		21:PA66 Blue V0
		46:PA66 Yellow V0

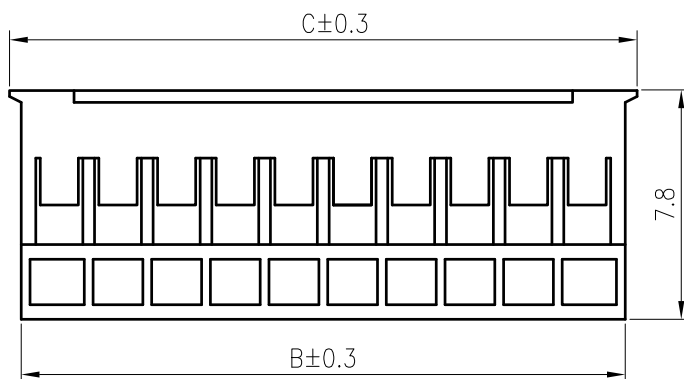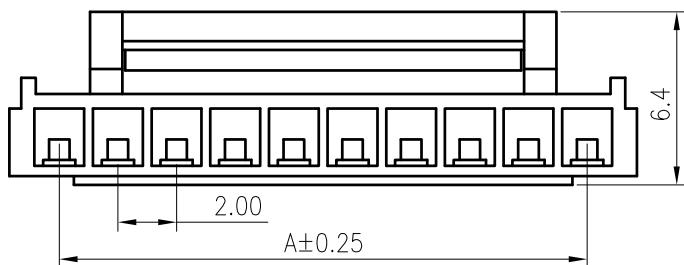

Circuits	Dimensions		
	A	B	C
2	2.00	4.60	5.60
3	4.00	6.60	7.60
4	6.00	8.60	9.60
5	8.00	10.60	11.60
6	10.00	12.60	13.60
7	12.00	14.60	15.60
8	14.00	16.60	17.60
9	16.00	18.60	19.60
10	18.00	20.60	21.60
11	20.00	22.60	23.60
12	22.00	24.60	25.60
13	24.00	26.60	27.60
14	26.00	28.60	29.60
15	28.00	30.60	31.60
16	30.00	32.60	33.60

F		Uniformly arrange the drawings	ZSZ	2021.09.22	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: PH2.0 Have buckle Housing	DRAWN: ZSZ 2021.09.22		KONNRA 东莞市康瑞电子有限公司				
		Add Yellow and Blue Specification	Arvin	2021.09.02			CHECKED:		DongGuan Konnra Electronics Co.,Ltd.				
	MARK		REVISION DESCRIPTION	SIGNATURE			DATE	UNIT:mm SCALE:N/A		SHEET:1/1 PROJECTION		PART NO.:H2004M***0301A	
	1	2	3	4			5	6	7	8	9	DRAWING NO.:2004H101-A-S	