
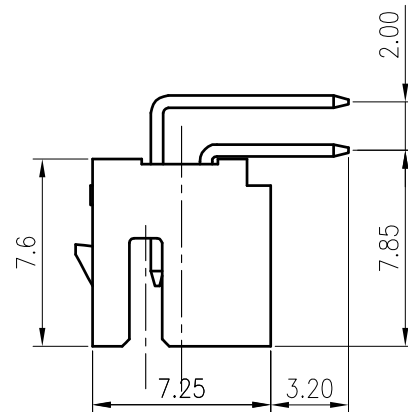


RoHS
COMPLIANT

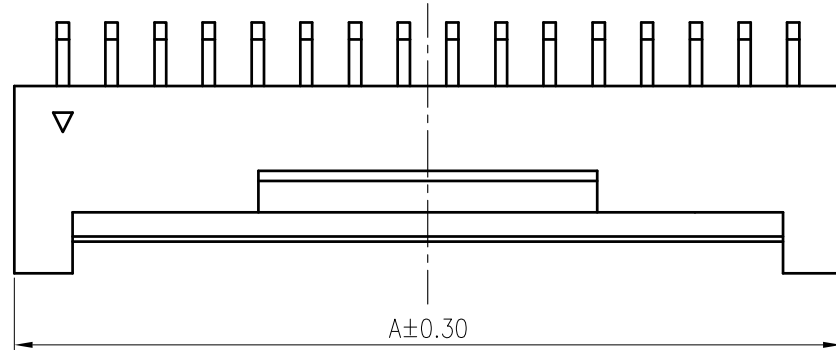

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 30mΩ/ max.



Material:

Insulator: PA66 UL94 V-0
 Contact: Brass
 Plating: Tin plated or gold plated over Nickel
 Mate with KR2012 series housing

Ordering Code:

C2012RD *** ** T01 01PC
 No. of Circuits ———— Plating
 202:2x2,20:2x20 ———— T01: Tin plated
 Insulator Material ———— G03: Gold plated 3u"
 22: PA66 Beige V0

Circuits	Dimension	
	A	B
2*2	6.00	2.00
2*3	8.00	4.00
2*4	10.00	6.00
2*5	12.00	8.00
2*6	14.00	10.00
2*7	16.00	12.00
2*8	18.00	14.00
2*9	20.00	16.00
2*10	22.00	18.00
2*11	24.00	20.00
2*12	26.00	22.00
2*13	28.00	24.00
2*14	30.00	26.00
2*15	32.00	28.00
2*16	34.00	30.00
2*17	36.00	32.00
2*18	38.00	34.00
2*19	40.00	36.00
2*20	42.00	38.00

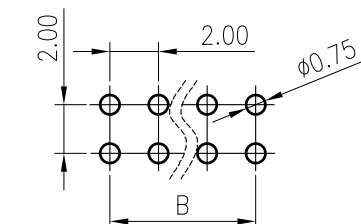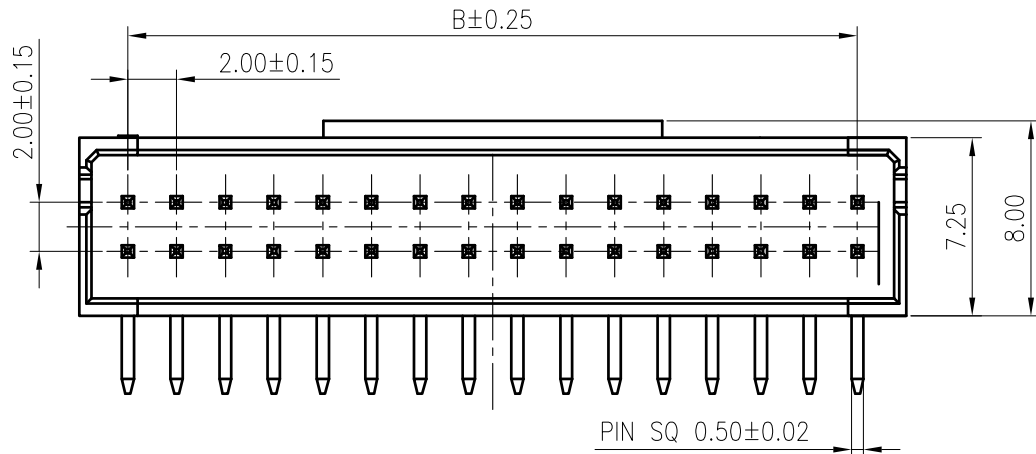

Recommended P.C.B. Layout
 Total tolerance: ±0.05mm

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A4	Add Dimensions	ZSZ	2022.05.20	X.X ±0.30	PHB2.0 DIP 90° Wafer	Shen 2022.01.08			A4	2012WRD201-C-S
A3	Uniformly arrange the drawings	Shen	2022.01.08	X.XX ±0.20						
				X.XXX ±0.10		UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	
				Angle ±2°						

KONNRA 东莞市康瑞电子有限公司
 DongGuan Konnra Electronics Co.,Ltd.

PART NO.: C2012RD***22***01PC

REV.: A4