

RoHS
COMPLIANT





SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ Max.

Material: PA66 UL94 V-2
 Suitable KR2507 series female terminal
 Mate with KR2507 series female housing
 Ordering Code:

H2507M *** 04 01C

No. of Circuits ————
 102:2,116:16
 Insulator Material ————
 04:PA66 Black V2

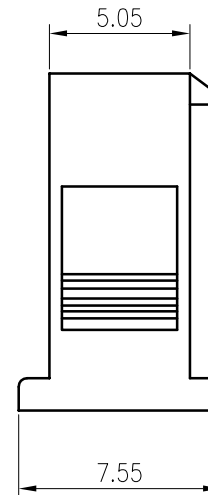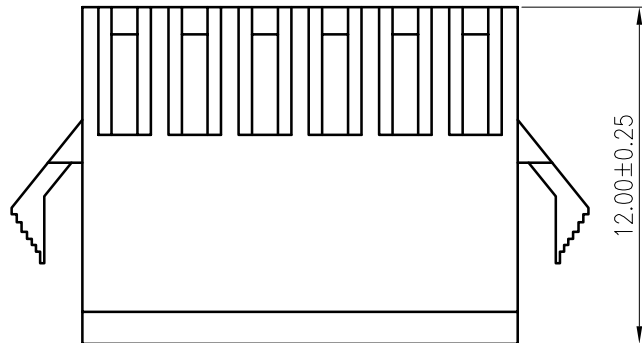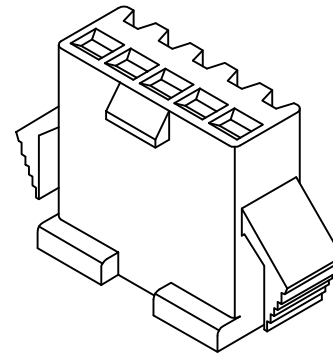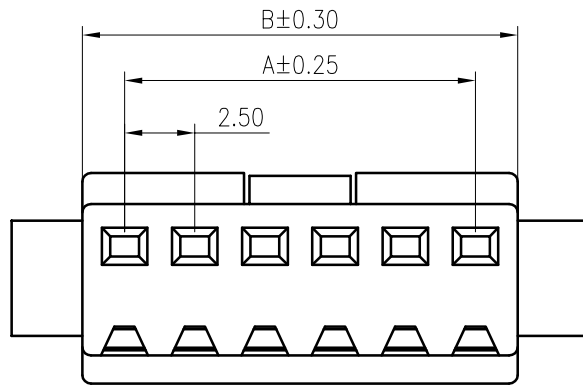

Circuits	Dimensions	
	A	B
2	2.50	5.5
3	5.00	8.0
4	7.50	10.5
5	10.00	13.0
6	12.50	15.5
7	15.00	18.0
8	17.50	20.5
9	20.00	23.0
10	22.50	25.5
11	25.00	28.0
12	27.50	30.5
13	30.00	33.0
14	32.50	35.5
15	35.00	38.0
16	37.50	40.5

				TOLERANCE	TITLE: SM2.5 Male Housing		DRAWN: Shen 2022.01.13		KONNRA 东莞市康瑞电子有限公司	
				X. X ±0.30			CHECKED:		DongGuan Konnra Electronics Co., Ltd.	
				X. XX ±0.20			APPROVED:		PART NO. : H2507M***0401C	
				X. XXX ±0.10			SHEET: 1/1		PROJECTION	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT: mm	SCALE: N/A				
1	2	3	4	5	6	7	8	9		