
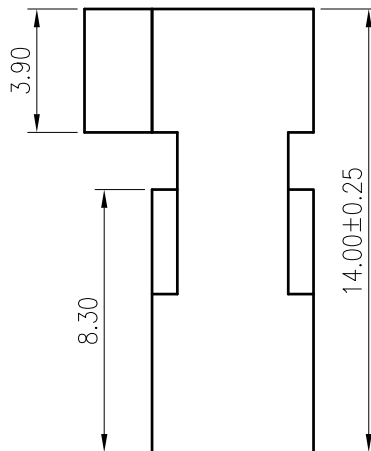
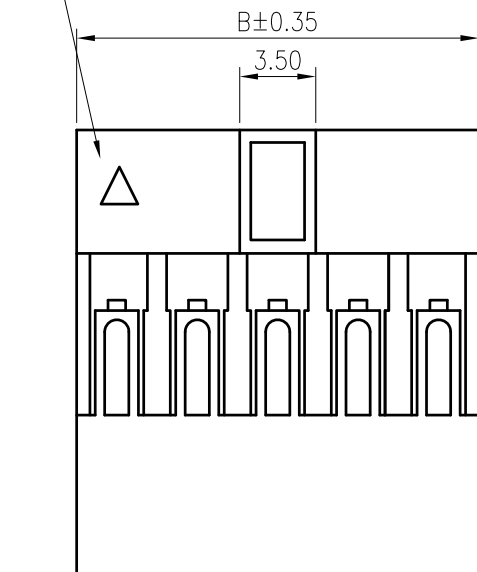


RoHS
COMPLIANT

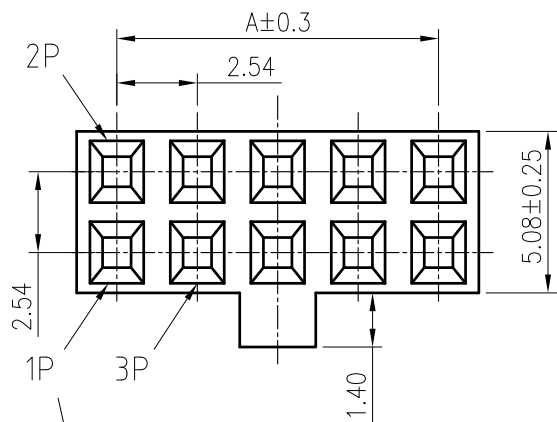

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PPO UL 94V-0
Suitable KR2542 series terminal
Mate with KR2542 series pin header

Ordering Code:

H25420 *** 06 03D

No.of Circuits }
202:2*2,222:2*22 }
Insulator Material }
06:PPO Black V0 }

A=2.54X(Circuits/2-1)
B=A+2.54



MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±2°

TITLE:

DP2.54 Housing

Dual Row Low

convexity

UNIT:mm

SCALE:N/A

DRAWN: *Arwin 2020.10.27*

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co.,Ltd.

PART NO.:H25420***0603D

REV.:A1

DRAWING NO.:2542H203-D-S

1

2

3

4

5

6

7

8

9