



- ◆SPECIFICATIONS
- Current rating: 2A AC, DC
  - Voltage rating: 250V AC,DC
  - Temperature range: -40°C ~ +105°C
  - Insulation resistance: 1000MΩ Min.
  - Withstanding voltage: 800V AC/ minute.
  - Contact resistance: 20mΩ Max.


Material: Brass  
 Finish: Tin Plated over Nickel  
 Applicable wires:  
 AWG #24~#28  
 Insulation O.D.: 1.4mm Max.  
 Suitable: KR2003 series Housing  
 Qty/reel: 10,000PCS




SECTION A-A

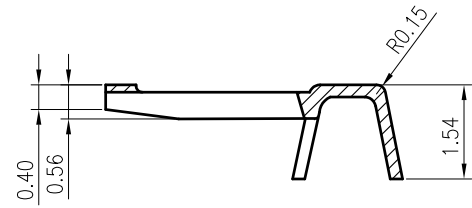

SECTION B-B



SECTION C-C



SECTION D-D

F		Uniformly arrange the drawings	ZSZ	2021.9.08	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: SAN2.0 90° Terminal	DRAWN: ZSZ 2021.9.08	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		Improve the strength of soldering foot	ZZN	2021.4.29			CHECKED:			
	MARK	VERSION RECORD	NAME	DATE			APPROVED:		PART NO.: T2003RBT0101D	
	1	2	3	4	UNIT:mm	SCALE:1:1	SHEET:1/1	PROJECTION	VER.:A5	DRAWING NO.:2003TR01-D-S