



**RoHS**  
COMPLIANT

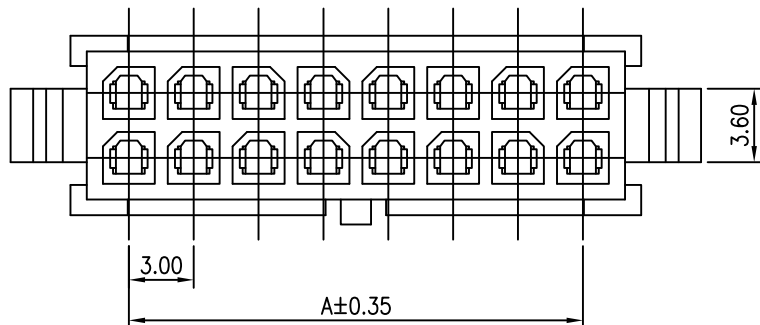

◆SPECIFICATIONS



- Current rating: 5A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon66 UL94 V-2  
 Suitable:KR3000 series Terminal  
 Mates With KR3000 series dual row male housing  
 and KR3000 series dual row wafer

Ordering Code:

H3000F \*\*\* 04 02B

No.of Circuits }  
 201:2x1,212:2x12 }  
 Insulator Material }  
 04:PA66 UL94V-2 }

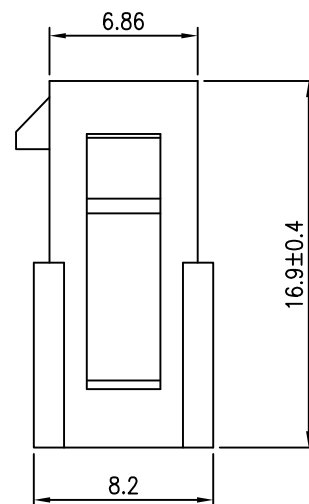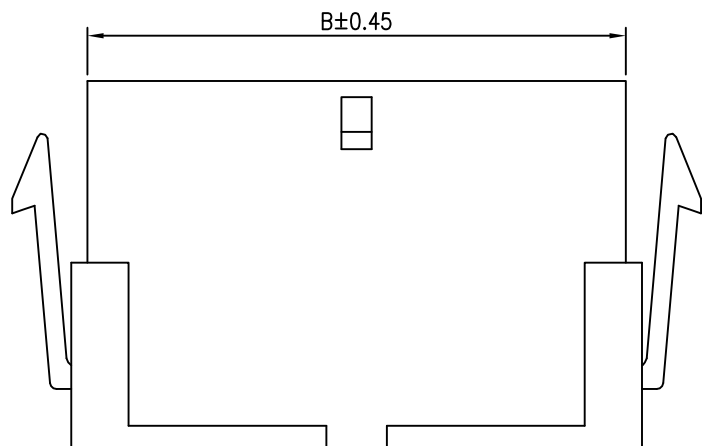

Circuits	Dimension	
	A	B
2x1	---	3.85
2x2	3.0	6.85
2x3	6.0	9.85
2x4	9.0	12.85
2x5	12.0	15.85
2x6	15.0	18.85
2x7	18.0	21.85
2x8	21.0	24.85
2x9	24.0	27.85
2x10	27.0	30.85
2x11	30.0	33.85
2x12	33.0	36.85

F					TOLERANCE	TITLE:	DRAWN: <i>Arwin 2017.03.29</i>	KONNRA 东莞市康瑞电子有限公司		
		Correct view	ZSZ	2024.3.28	X.X ±0.30	MX3.0 Double Row	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.		
		Change the part number and frame format	ZSZ	2022.03.24	X.XX ±0.20	Female Housing	APPROVED:	PART NO.:H3000F*****02B		
					X.XXX ±0.10	With wings		REV.:A03	DRAWING NO.:3000HF202-B-S	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	