

<b>Product Specification</b> (产品规格书)	<b>Issued By:</b> <b>Engineering Dept.</b>				
	<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification	<table border="1"> <tr> <td><b>Date Issued</b></td> <td>2022/2/26</td> </tr> <tr> <td><b>Date Revised</b></td> <td>2022/2/26</td> </tr> </table>	<b>Date Issued</b>	2022/2/26	<b>Date Revised</b>
<b>Date Issued</b>	2022/2/26				
<b>Date Revised</b>	2022/2/26				
<b>Document Number:</b> PS-KR4200-02	<b>Revised /Edition</b>	A1			

**1.0 适用范围 (Scope)**

此种规格包括4.20mm Pitch KR4200 Series 连接器规格说明。

This Specification Covers the 4.20mm Pitch KR4200 Series Connector Specification.

**2.0 规格与料号 (Spec and Part number)**

规格内容 <b>Specification</b>	产品料号 <b>Production No.</b>	产品图示 <b>Picture of Product</b>
胶壳/Housing	H4200M***1601A	
端子/Terminal	T4200FB***01B	
针座/Wafer	C4200RD1**16T0101PC C4200RD1**16T0102PC C4200VD1**16T0101PC C4200RD2**16T0101PC C4200RD2**16T0102PC C4200VD2**16T010*PC C4200VD2**16T0103*B C4200VD2**16T0104*B	

**3.0 材质与表面处理 (Disposal of Material and surface)**

规格内容 <b>Specification</b>		材 质 <b>Materials</b>	表面处理 <b>Disposal of Surface</b>	
胶壳/Housing		PA66	UL94 V-0 or V-2	
端子/Terminal		Brass	Tin Plated or Gold Flash Over Nickel	
针座/ Wafer	立式 Straight (DIP 180° )	主体 Base	PA66	UL94 V-0 or V-2
		导体 Contact	Brass	Tin Plated Over Nickel
		固定片 Solder tab	None	None
	卧式 Right Angle (DIP 90° )	主体 Base	PA66	UL94 V-0 or V-2
		导体 Contact	Brass	Tin Plated Over Nickel
		固定片 Solder tab	None	None

(以上参数请以工程图为准/Please Refer to the Project drawing for the above Specification)

**Product Specification(产品规格书)****Issued By:**  
**Engineering Dept.****Subject (主题):**

4.20mm Pitch KR4200 Series Wire To Board Connector Specification

**Date Issued**

2022/2/26

**Date Revised**

2022/2/26

**Document Number:** PS-KR4200-02**Revised /Edition**

A1

**4.0 额定等级 (Ratings and applicable wires)**

项 目 Item	规 格 Standard	
额定电压Rated Voltage (Max.)	600V	AC/DC
额定电流Rated Current (Max.)	9A(16AWG)	
使用温度范围Ambient temperature Range	-40°C~+105°C	
适用线径Applicable wire insulation O.D	AWG 16#~20# Insulation O.D. 3.10 mm Max.	

**5.0 电气性能 (Electrical Performance)**

项 目 Item	条 件 Test Condition	规 格 Requirement
5.1 接触阻抗 Contact Resistance	公母配合,开放电压 20mV 最大,电流 100mA最大 检测连接器A~B 区. Mate connectors, measure by dry circuit, 20mV MAX, 100mA MAX. (Based upon EIA-364-23C)	10 milliohms Max.
5.2 绝缘阻抗 Insulation Resistance	公母配合,对相邻两接触导体,于1分钟内施 加500V 的直流电,并量测其间绝缘阻抗. Mate connectors,apply 500V DC for 1 minute between adjacent contacts to measure the insulation resistance. (Based upon EIA-364-21B)	1000 Megohms Min.
5.3 耐电压 Dielectric Strength	公母配合,在相邻端子或端子与接地端之 间,使用 1500V的交流电1 分钟,检测连接器. Mate connectors, apply 1500V AC for 1 minute between adjacent terminal or ground. (Based upon EIA-364-20A)	无损毁或出现电火花 No Breakdown and Flashover

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR4200-02		<b>Revised /Edition</b>	A1

**6.0 机械性能 (Mechanical Performance)**

项 目 Item		条 件 Test Condition		规 格 Requirement		
6.1	插拔力 Insertion & Withdrawal Force	以每分钟25.4±3mm的速率插入和拔出。 (不包含卡榫结合力) Insert and withdraw connectors at the speed rate of 25.4±3mm/minute. (Excluding plastic detents) (Based upon EIA-364-13D)		参照第8.0项 Refer to paragraph 8.0		
6.2	端子插入力 Terminal Insertion Force	铆线后之端子插入胶壳。 Insert the crimped terminal into the housing.		1.5 kgf (14.7 N) Max.		
6.3	端子保持力 Terminal/Housing Retention Force	以每分钟25.4±3mm的速率,将端子从胶壳内轴向拔出的力量。 Apply axial pull out force at the speed rate of 25.4±3mm/minute on the terminal assembled in the housing.		3.0 kgf (29.4 N) Min.		
6.4	Pin 针保持力 Pin Retention Force	以每分钟 25.4±3mm 的速率,将PIN针从Wafer 内轴向拔出的力量。 Apply axial push force at the speed rate of 25.4±3mm/minute.		1.0 kgf (9.8 N) Min.		
6.5	端子压接 Terminal Crimping Specification	Wire Size		16 AWG	18 AWG	20 AWG
		①	Crimp width	1.90±0.10		
			Crimp height	1.15±0.05	1.08±0.05	1.05±0.05
		②	Crimp width	2.65 Max.		
			Crimp height	2.25 Max.	2.10 Max.	2.05 Max.
		Crimp strength (kgf)	13.60 Min.	9.07 Min.	6.80 Min.	
		Stripping (mm)	2.6~3.2			
①Conductor(mm) ②Insulation(mm)						

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR4200-02		<b>Revised /Edition</b>	A1

**7.0 环境性能及其它 (Environmental Performance and Others)**

项 目 Item		条 件 Test Condition	规 格 Requirement	
7.1	耐久性 Durability	以每分钟不超过 10 次的速率,将公母插拔30次. When mated up to 30 cycles repeatedly by the rate of 10 cycles per minute. (Based upon EIA-364-09C)	接触阻抗 Contact Resistance	20 milliohms Max.
7.2	温升测试 Temperature Rise	公母对插后,在通过额定电流下,所测定的温度. Carrying rated current load. (Based upon EIA-364-70B)	温升测试 Temperature Rise	30°C Max.
7.3	耐振动性 Vibration	振幅: 1.5mm P-P 时间: 10~55~10 HZ in 1 minute 持续时间: 每轴向 2 小时 Amplitude: 1.5mm P-P Sweep time: 10~55~10 HZ in 1 minute Duration: 2 hours in each X.Y.Z axials. (Based upon EIA-364-28B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
			瞬断 Discontinuity	1 micro-second Max.
7.4	耐冲击性 Shock	在 X.Y.Z 上 6 个方向上,以 490m/s <sup>2</sup> (50g) 冲击下各 3 回. 490m/s <sup>2</sup> {50g}, 3strokes in each X.Y.Z. axes. (Based upon EIA-364-27B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
			瞬断 Discontinuity	1 micro-second Max.
7.5	耐热性 Heat Resistance	105±2°C,96 hours. (Based upon EIA-364-17B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
7.6	耐寒性 Cold Resistance	-40±2°C,96 hours. ( Based upon EIA-364-59)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR4200-02		<b>Revised /Edition</b>	A1

项 目 Item		条 件 Test Condition	规 格 Requirement	
7.7	耐湿性 Humidity	温度: 40±2°C 湿度: 90~95%(RH) 持续时间: 96 hours Temperature: 40±2°C Relative Humidity: 90~95% Duration: 96 hours (Based upon EIA-364-31B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
			耐电压 Dielectric Strength	Must meet 5.3
			绝缘阻抗 Insulation Resistance	100 Megohms Min.
7.8	热冲击 Thermal shock	以-40°C持续30分钟经室温5分钟,而后以 105°C持续30分钟再经室温5分钟为一个 循环,共循环5次. One Cycle Consists Of: -40°C for 30 minutes. → Room Temp. 5 minutes, +105°C for 30minutes. → Room Temp. 5 minutes Total Cycles: 5 Cycles. (Based upon EIA-364-32B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
7.9	盐水喷雾 Salt Spray	在温度35±2°C,盐水浓度5±1%下,盐水喷 雾24小时. 24 hours exposure to a salt spray from the 5±1% solution at 35±2°C. (Based upon EIA-364-26B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	20 milliohms Max.
7.10	焊锡附着性 Solder-ability	焊接时间: 3±0.5 秒. 焊接温度: 245±5°C. Soldering Time: 3±0.5 second. Solder Temperature: 245±5°C. (Based upon EIA-364-52)	Solder Wetting	浸渍面积需 95%以上 95% of immersed area must show no voids, pin holes.

<b>Product Specification(产品规格书)</b>	<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification	<b>Date Issued</b>	2022/2/26
	<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR4200-02	<b>Revised /Edition</b>	A1

	项 目 <b>Item</b>	条 件 <b>Test Condition</b>	规 格 <b>Requirement</b>	
7.11	焊锡耐热性 <b>Solder-Resistance</b>	DIP型产品，能够承受焊锡耐热范围。 DIP type products, able to withstand the solder heat resistance range. 参考温度曲线图9.0 Refer to Temperature Profile9.0 (Based upon EIA-364-56D)	外观 Appearance	无异状 No Damage

### 8.0 综合插入力及拔出力 (Insertion/withdrawal force) <Unit: kgf>

单排Single Row


No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 30 <sup>th</sup> 30次插入 与拔出后	No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 30 <sup>th</sup> 30次插入与 拔出后
	I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力	R.F.(MIN.) 拔出力		I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力	R.F.(MIN.) 拔出力
2	3.00	0.20	0.15	5	7.50	0.50	0.40
3	4.50	0.30	0.25	6	9.00	0.60	0.50
4	6.00	0.40	0.30				

双排Dual Row

No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 30 <sup>th</sup> 30次插入 与拔出后	No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 30 <sup>th</sup> 30次插入与 拔出后
	I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力	R.F.(MIN.) 拔出力		I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力	R.F.(MIN.) 拔出力
2*1	3.00	0.20	0.15	2*7	21.00	1.40	1.20
2*2	6.00	0.40	0.30	2*8	24.00	1.60	1.40
2*3	9.00	0.60	0.50	2*9	27.00	1.80	1.60
2*4	12.00	0.80	0.60	2*10	30.00	2.00	1.80
2*5	15.00	1.00	0.80	2*11	33.00	2.20	2.00
2*6	18.00	1.20	1.00	2*12	36.00	2.40	2.20

<b>Product Specification</b> (产品规格书)	<b>Issued By:</b> <b>Engineering Dept.</b>	
	<b>Date Issued</b>	2022/2/26
<b>Subject (主题):</b> 4.20mm Pitch KR4200 Series Wire To Board Connector Specification	<b>Date Revised</b>	2022/2/26
	<b>Revised /Edition</b>	A1
<b>Document Number:</b> PS-KR4200-02		

**9.0 波峰焊曲线(Wave soldering profile)**

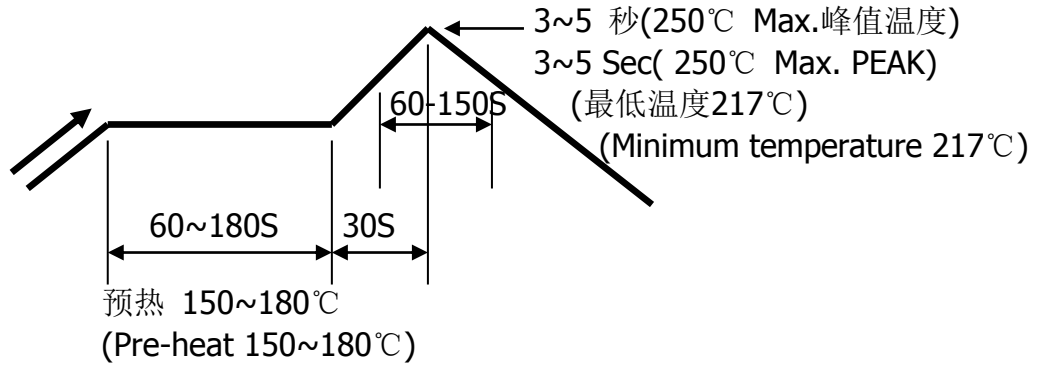

注：由于P.C板等焊接装置改变条件,所以请预先用自己的装置检查焊接条件.

Notes: Please check welding conditions by your own devices beforehand. Because the condition changes by the soldering devices, P.C.boards, and so on.

**10.0 备注 (Remark)**

有关规格书内容经变更或改版，如未能及时发布与通知，烦请联系我司业务人员提供产品最新资讯

Any change or revision for the product specification will not be announced in advance.

Please contact our sales representative for the latest information.

Written: Arvin

Checked: /

Approved: Min xinhao